




# Weatherproof Receptacle Covers with Patented Insert Design



GFCI DEVICE SHOWN NOT INCLUDED

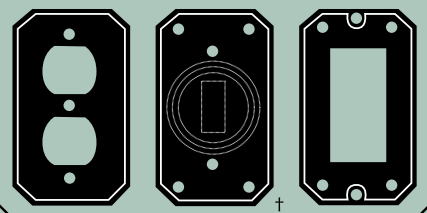


Single Gang Flexi-Guard

† Converts to toggle, 1-3/8", 1-5/8", 1-3/4", or 2-1/8" diameter round



GFCI DEVICE SHOWN NOT INCLUDED

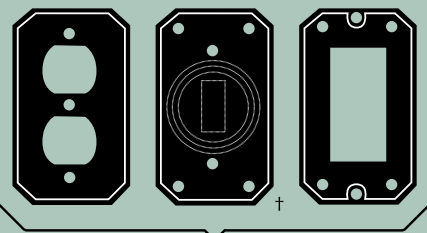

Single Gang Flexi-Guard

† Converts to toggle, 1-3/8", 1-5/8", 1-3/4", or 2-1/8" diameter round

## WP1000RC - Vertical Cover WP1000HRC - Horizontal Cover

### Recessed Weatherproof While-In-Use Cover

#### Product Features


- Complies with 2005 NEC® Article 406.8(B)(1)
- Heavy duty, polycarbonate cover for long lasting durability

#### Applications

Provides an attractive, code compliant solution for protecting while-in-use outdoor receptacles.

#### Specifications

- Device installs recessed in wall for a flush finish for Siding, Stucco or Brick finishes
- Removable siding flange provides clear finish for all siding types
- Patented single gang inserts for GFCI, duplex, single receptacles, toggle switch and blank
- Heavy Duty Gasket ensures protection from the elements
- Recessed Sleeve adjusts to ensure lowest profile installation in every application
- Outlet box offers mounting options for stud, block, brick or cut-in
- Cord exit easily handles two 12/3 cord sets
- Handles NmB (Non-Metallic Building Wire) or conduit installations
- Wider access to device for easy cord set installation
- Heavy duty, UV resistant, polycarbonate constructed cover



2.00 lbs  
0.91 kg

Warranty: Limited 1-year warranty

Item#	Description
WP1000RC	Recessed In-Use Cover Kit: Includes Back Box, Siding Flange, and Vertical Mount Finish Kit
WP1000HRC	Recessed In-Use Cover Kit: Includes Back Box, Siding Flange, and Horizontal Mount Finish Kit
WP1000BOX	Recessed In-Use Cover Back Box Only
WP1000FLNG	Recessed In-Use Cover Siding Flange Only
WP1000VFIN	Recessed In-Use Cover Vertical Finish Kit Only
WP1000HFIN	Recessed In-Use Cover Horizontal Finish Kit Only

## WP2000 Flexi-Guard Outlet Post

### Weatherproof While-In-Use Cover

#### Product Features

- Complies with 2005 NEC® Article 406.8(B)(1)
- Heavy duty PVC construction for long lasting durability

#### Applications

Provides a new, code compliant solution for supplying power to gardens and other out-of-the-way areas. A remotely mounted energy saving photo control and/or timer also available to activate area lighting

#### Specifications

- Patented single gang inserts for GFCI, duplex, single receptacles, toggle switch and blank
- Provisions for installing mechanical or digital timers to control area lighting:
  - PB912M10R: 24 hour, 120 Volt mechanical timer – allows for 2 ON/OFF daily cycles
  - PB313EK: 24 hour, 120 Volt electronic timer – allows for 8 ON/OFF daily cycles (Timers sold separately)
- Provisions for fixed-position, stem-mounting and stem & swivel mounting photo controls to control area lighting
- All ports accept 1/2", 3/4", or 1" PVC conduit (adapters included)
- Base includes mounting holes and template for optional concrete/pavement mounting
- Cover includes lockable hasp

Warranty: Limited-1 year warranty



3.00 lbs  
1.36 kg